

476-1933

2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN THE APPLICATION OF)

Roy Harold Mauger)

SERIAL NO: To Be Assigned)

FILED: Herewith)

FOR: Communications Network)



I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to "Director of Patents and Trademarks, Washington, D.C. 20231", on July 24, 2000.

Name of person signing Deborah E. Dudek

Signature Deborah E. Dudek

CLAIM FOR PRIORITY

Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Under the International Convention, for the purposes of priority, applicant claims the benefit of the United Kingdom Application No. 0001040.5, filed January 17, 2000.

A certified copy of said application is appended hereto.

DATE: July 24, 2000

Respectfully submitted,


William M. Lee, Jr.
William M. Lee, Jr.
Registration No. 26,935

LEE, MANN, SMITH, MCWILLIAMS
SWEENEY & OHLSON
P.O. Box 2786
Chicago, Illinois 60690-2786
(312) 368-1300
Fax (312) 368-0034



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated - 4 JUL 2000

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

An Executive Agency of the Department of Trade and Industry

Best Available Copy

Patents Act 1977
(Rule 16)



The
Patent
Office

18JAN00 E505915-1 D02889
P01/7700 0.00-0001040.5

Statement of inventorship and of right to grant of a patent

(See the notes on the back of this form. You can also get
an explanatory leaflet from the Patent Office to help
you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

11862ID

2. Patent application number
(The Patent Office will fill in this part)

0001040.5

17 JAN 2000

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

Nortel Networks Corporation
World Trade Center of Montreal
380 St Antoine Street West
8th Floor
Montreal, Quebec H2Y 3Y4
Canada

Patents ADP number (if you know it)

06258966001

07657656001

If the applicant is a corporate body, give the
country/state of its incorporation

Quebec, Canada

4. Title of the invention

Communications Network

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Nortel Networks
IP Law Group
London Road
Harlow
Essex CM17 9NA

Patents ADP number (if you know it)

07562531002

6. If you are declaring priority from one
or more earlier patent applications,
give the country and the date of filing
of the or of each of these earlier
applications and (if you know it) the or
each application number

Country Priority application number
(if you know it)

Date of Filing
(day/month/year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of the
earlier application

Number of earlier application

Date of Filing
(day/month/year)

8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an
applicant, or
- c) any named applicant is a corporate body.
See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.
Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	9 + 9

[Handwritten signature]

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents (*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 17 January 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

J P W Ryan
01279 405679

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or

COMMUNICATIONS NETWORK**FIELD OF THE INVENTION**

This invention relates to arrangements and methods for the switching of routing of traffic in a communication network

BACKGROUND OF THE INVENTION

5 Traditionally, two types of legacy telecommunication networks have been developed. The first type is connection oriented and is used for the transport of narrow band voice traffic, typically carried in TDM frames. Such networks comprise for example synchronous or plesiochronous networks. The second type of legacy network is connectionless in nature and is used for the transport of broad band packet or cell-
10 based data traffic. Such packet traffic includes for example Internet protocol (IP) traffic. There is currently a drive towards unified networks which provide end to end transport for both voice and data services, and to this end the use of asynchronous transport has been introduced. This of course introduces the problem of supporting different protocols over a common network.

15 Asynchronous Transfer Mode (ATM) was the technology specified by the ITU-T as a broadband network technology suitable for all applications. For Internet protocol traffic however, ATM has proven to be ineffective at supporting Layer 3 routed applications such as routed virtual private networks. This has led the IRTF (Internet
20 Research Task Force) to specify multi-protocol label switching (MPLS) as a technology which inherits the desirable characteristics of ATM but is better matched to the Internet protocol. In particular MPLS provides a frame merge function in which data frames received from multiple sources are captured and sent out with a common label. This is key to support of Internet protocol Layer 3 Routed services.
25 Service providers would ideally prefer a single network technology to support all of the services that they provide as this would achieve the lowest possible operational cost.

Reference is here directed to Multiservice Switching Forum Contribution Number:
30 MSF 99.245 (Multiservice Switching Forum System Architecture Implementation Agreement) available at www.msforum.org, the contents of which are incorporated herein by reference. The use of the term "reference point" within this document should be taken as pertaining to this document.

A particular problem with the introduction of a multi-service network is that of accommodating the various transport protocols and, in particular, that of providing end to end quality of service guarantees for high priority traffic such as voice. A further problem with such a network is that of real time management of virtual public/private networks that are established within the network. At present, each VPN manager requires a detailed knowledge of the network topology. In a large network this is a very significant operational task.

10 SUMMARY OF THE INVENTION

An object of the invention is to minimise or to overcome the above disadvantage.

According to a first aspect of the invention, there is provided a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture whereby IP services are run directly over a frame-based core network and legacy services are run over ATM adaptations and emulated ATM services.

According to a further aspect of the invention, there is provided a method of operating a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels, wherein ATM is used for low or medium capacity access, and wherein frame mode is used for access to corporate users and for core transport.

According to another aspect of the invention, there is provided a communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport network is provided, and a network management system arranged to define and manage one or more virtual public/private networks within said communications network, wherein groups of said core nodes are configured as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes.

According to another aspect of the invention, there is provided a method of operating a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels, wherein ATM is used for low or

medium capacity access, and wherein frame mode is used frame-mode is used for access to corporate users and for core transport.

- 5 According to a further aspect of the invention, there is provided a method of operating a communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport network is provided, and having a network management system arranged to define and manage one or more virtual public/private networks within said communications network, the method comprising
- 10 configuring groups of said core nodes as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes.
- 15 Advantageously, operating instructions for the method may be provided in machine readable software form on a storage medium.

Advantageously, a virtual private/public network is defined with multiple stages of constraint-based routed label switched paths.

20

In a preferred embodiment, traffic trunks are specified by defining paths between service nodes passing through abstract nodes. Those paths are then used to construct CR-LDP requests to establish the traffic trunks

- 25 MPLS has been defined by the IETF so as to be independent of the underlying transport mechanism. Mappings on to ATM have been defined as well as frame-mode networks using HDLC (High-level data link control) based or other forms of frame transport.

- 30 MPLS includes the concept of stacked labels; this allows a network to operate at multiple layers. For instance a first label in the stack can relate to a traffic trunk. A switch which only swapped this first label would handle the traffic trunk transparently. A switch which popped the first label, swapped the second label and pushed a new first label would be switching a service instance between two traffic trunks. A set of
- 35 such traffic trunks allocated to a service sub-network and switching by swapping the second label, is the exact equivalent of the MSF virtual switch concept. However, in

the MPLS case, virtual switches are only visible at designated service nodes as their traffic trunks pass transparently through core nodes.

5 The ATM Forum has defined a mechanism for the transport of ATM over HDLC (High-Level Data Link Control) based frame-mode transport and has engaged on an activity to specify the use of this mechanism in frame-based MPLS networks. In particular the methods for mapping ATM services and traffic contracts onto their MPLS equivalents will be specified.

10 The arrangement and method enable the definition of a frame-mode MPLS version of the MSF architecture, in which, IP services will run directly over the frame-based core network and legacy services will run over ATM adaptations and emulated ATM services.

15 The network architecture may be mapped onto the MSF architectural model, and in particular adapts the use of constraint-based routed label distribution protocol (CR-LDP) to simplify the task of super-ordinate and sub-ordinate network management.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:-

25 Figure 1 is a schematic diagram of an exemplary virtual public/private network according to a preferred embodiment of the invention;

Figure 2 shows the construction of an abstract node employed in the network of figure 1 and illustrates the network construction in further detail;

30 Figure 3 shows an exemplary Layer 1 management and bearer control architecture;

35 Figure 4 illustrates a virtual public/private network information model;

Figure 5 illustrates a Layer 2 management and bearer control architecture;

Figure 6 illustrates the construction of a service node supporting ATM SVC service;

5 Figure 7 illustrates the construction of a service node supporting leased-lines;

Figure 8 illustrates the construction of a service node for SIP session-switched services; and

10

Figures 9a to 9d shows comparisons between adaptation and switching plane functions for preferred embodiments of the invention and for legacy networks .

15

DESCRIPTION OF PREFERRED EMBODIMENTS

Referring first to figure 1 this figure illustrates in highly schematic form an exemplary virtual public/private network (VPN) deployed nationally or regionally in order to provide session switched multimedia services on a territorial basis. The network comprises a number of service nodes 11, located at the main centres of population, inter-linked via a network of core nodes by quality-of-service (QoS) capable tunnels 12. The construction of the core network will be described below; in figure 1 only one core node 18 is shown in the interests of clarity. Access to the network from user terminals 13 is provided via media gateways 14 each serving to one or more service nodes. Traffic is transported on constraint-based routed label switched paths (CR-LSP) 15 established between respective gateways. The network carries packet traffic, each packet 16 comprising a payload and first and second labels (Label1, Label2). Within the network of figure 1, virtual public/private networks can be established as will be discussed below.

30

CR-LSPs are deployed between the service nodes. Services such as inter-active voice, requiring strict QoS guarantees are supported by end-to-end CR-LSPs 15 as illustrated in figure 1. To take a simple example of QoS support, if all of the CR-LSPs at both traffic-trunk level and end-to-end are constant bit rate, then the performance of the end-to-end CR-LSP can be substantially equivalent to ATM-AAL1 assuming 35 48-byte packetisation.

Within MPLS the CR-LDP protocol can be used to establish the constraint-based routed label switched paths (CR-LSP). These are point-to-point paths between designated nodes that are assigned a traffic contract which, in suitable carrier strength implementations, will be policed for conformance. Such a CR-LSP has an LSPID (label switched path identifier) which can be used to specify a hop in a CR-LDP request. In such a case the new CR-LSP will be multiplexed into the specified CR-LSP and allocated a second level label. It is therefore possible to specify a virtual public/private network (VPN) with multiple stages of first level CR-LSPs and to provide end-to-end services having a CR-LSP traffic contract. It is also possible to use GSMP to switch between pairs of labels to achieve the same effect as Virtual Switch control in Release 1 of the MSF Architectural Implementation Agreement. In the network of figure 1, GSMP control or CR-LDP control of the two-label stack can be employed depending on the service objective

A feature of the CR-label distribution protocol (CR-LDP) employed herein is the use of an "abstract node" to define routing constraints. An abstract node consists of a sub-network of real nodes (core nodes) over which CR-LDP is allowed to select any available path to achieve the requested connection. Thus in a path specified as (real node A-abstract node B-abstract node C-real-node D) there may be multiple nodes in each of the abstract nodes, there may also be multiple trunks between the abstract nodes. This simplifies the management of a VPN as the network manager only requires a view of the network at the abstract node level and does not require detailed view of the construction or internal operation of an abstract node.

Referring now to figure 2, this depicts in schematic form a portion of the network of figure 1. Figure 2 is a representation of a simple network in its abstract node form, together with a possible real network version of one of the abstract nodes.

The network represents groups of multiple service nodes (SN) 11 each arranged around a respective abstract node (AN) 22 in each of four locations. One of the abstract nodes is exploded to show its construction from a sub-network of four core nodes (CN) 18 with multiple transport links 24. In the network, an abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are part of the abstract node. It will of course be understood that an abstract node may be constructed from some other number of core nodes, and indeed, in some applications a single abstract node may encompass a large number of core nodes covering a wide area of the network. Further, abstract nodes can have

a temporary, semi-permanent or permanent existence depending on the network requirements.

5 Constraint based routed label switched paths 15 are deployed between service nodes via the intervening abstract nodes.

10 It is relatively simple for a management system controlling the real network to produce an abstract node version of its information model for use on a super-ordinate network manager. It is also easy to produce a graphical representation of such a network and to specify traffic trunks by drawing paths between service nodes passing through abstract nodes. These graphical paths can then be used to automatically construct CR-LDP requests to establish the traffic trunks. CR-LDP can run on an existing constraint-based routed label switched path (CR-LSP) to renegotiate the traffic contract so the scheme provides for near real-time creation of VPNs as well as
15 flexible service level agreements which can be modified on a diurnal basis or on any basis which suits the customer traffic profile.

A management and bearer control function for the layer 1 physical network of figures 1 and 2 is illustrated in figure 3. This figure shows by way of example a simple
20 network based on core nodes 18, constituting an abstract node 22, and service nodes 11. The real network has a management system based on a hierarchical structure of element managers 31 and (sub) network managers 32. The (sub) network manager 32 is responsible for constructing the abstract node information model representation of the network which it passes to a super-ordinate manager 33.
25 A sub-ordinate manager 36 provides virtual switch management to perform fault, configuration, accounting, performance, and security management. The super-ordinate manager 33 is used for defining VPNs and placing traffic trunks to realise those VPNs. The super-ordinate manager also creates, modifies and deletes virtual switches. Traffic trunk requests are passed to bearer control Layer 1 (34) to initiate
30 the CR-LDP process, this is the bc reference point for Layer 1 for which the common open policy service protocol (COPS) is preferred. The Layer 1 bearer control function 34 could in some applications be de-coupled from the physical switch using a vsc (virtual switch control) reference point general switch management protocol (GSMP) interface. However, this would not add any additional generality to the
35 architecture as the virtual switches are confined to the Layer 2 service nodes in the frame-mode MPLS version of the MSF model.

The information model illustrated in figure 4 for the sub-network manager 32 is also simple in that only the Layer 2 virtual switches (VS) 41 are visible. These virtual switches are configured with access ports 42 to which users are connected and traffic trunks 43 configured end-to-end and provisioned with SLAs.

5

As the VPN is only visible at service nodes, then the Layer 2 bearer control function need only be applied at service nodes. For the end-to-end high QoS CR-LSPs discussed above there are two possibilities for controlling the connection. These are CR-LDP as discussed above or GSMPv3.

10

This is illustrated in figure 5 in which the bearer control Layer 2 (51) is shown using GSMPv3 at the vsc reference point, private network-network interface (PNNI) at the ic (inter-MSS bearer control signalling) reference point and UNI v 4.0 Proxy at the bc (bearer control) reference point.

15

For the bearer control Layer 2 there are a number of candidates, some options will be considered below in the context of the following:-

- ATM SVC service network
- Leased-line service network
- SIP based session-switched multimedia service network

20

A service node providing ATM SVC service with its associated control functions are shown in figure 6. Referring to figure 6, the logical port function 61 in the adaptation plane provides adaptation from an ATM adaptation function to an end-to-end CR-LSP. Advantageously, General Switch Management Protocol (GSMP) is used on the vsc reference point in order to cross-connect the end to end CR-LSP between input and output traffic trunks of the virtual switch 41 in the switching plane. H.248 protocol may be used to configure an ATM adaptation function in the logical port 61, to establish the end-to-end CR-LSP in the media gateway and to cross-connect the adaptation function with the end-to-end CR-LSP. UNI v 4.0 Proxy and PNNI are used at the bc and ic reference points as discussed above.

25

30

35

In the case of a leased-line service network the sub-ordinate manager 36 (figure 7) subsumes all of the functions in the control plane. It is able to use CR-LDP embedded in the network to control the virtual switch 41 implicitly by specifying the series of traffic trunks that the sub-ordinate manager wishes to use for the end-to-end connection. It would then use H.248 to configure an appropriate adaptation function

and cross-connect this to the end-to-end CR-LSP. This procedure is illustrated schematically in figure 7. This sub-network manager could advantageously represent the whole virtual network as an abstract node, in which case end-to-end routing is fully controlled by the embedded CR-LDP function.

5

For the SIP based session-switched service network a proposal has been made to the IETF to consider session initiation protocol (SIP) as a bearer control protocol for managing end-to-end CR-LSPs. The advantage of deploying SIP in this application is that it is able to explore multiple paths in parallel and to record the route taken. In the referenced document the recorded route of the preferred path is then used to initiate CR-LDP using COPS over the sp reference point, this is consistent with existing MPLS standards but in fact leads to a bearer control which requires two round trips of signalling to execute a connection. A preferred approach would be to use SIP at the ic reference point and GSMP at the vsc reference point which could execute a connection with a single signalling round trip. This preferred approach is illustrated in figure 8.

In this case the logical port function 61 is constituted by a packet relay such as a Firewall. Preferably, H.248 is used to configure firewall functions such as PPP or L2TP terminations, network address translators, etc. H.248 is also used to establish the end-to-end CR-LSP in the media gateway and to cross-connect the corresponding IP ports to the end-to-end CR-LSP for real-time services. For web access services the logical port function would provide a proxy for secure access to the Internet; this is not shown. GSMP is used over the vsc reference port to control the virtual switch. SIP is used over the ic reference point to interrogate multiple paths. Multiple invites are received at the destination bearer control function but only one OK message is sent on the preferred path. This can trigger the GSMP function on the intermediate virtual switches to complete the connection. SIP is also used on the ia interface as implied by the service node definition. SIP can also be used to provide the equivalent function to the topology state packet in PNNI so that the bearer control function 62 can be aware of remote congestion points in the network and take avoiding action. Further the bearer control function can also act as a subordinate management function. To do this, the bearer control function acts as a relay point for the COPS messages from the super-ordinate manager to the Layer 1 bearer control function and exchanges topology and state information with other parts of the distributed bearer control function.

Frame-mode transport is considered to be ahead of ATM transport i.e. OC192/STM64 versus OC48/STM16 for line speed operation. Clearly four such OC48/STM16 trunks may be multiplexed up for transport at OC192/STM64 but line-speed operation provides the simplest architecture. Depending on assumptions about traffic mix, then frame-mode transport is somewhat more efficient than ATM transport as illustrated by way of example in the following table. For 20% Legacy and 80% IP the MPLS Core is approximately 10% more efficient than an ATM Core.

Table 1

IP Packet (bytes)	% of Total Packets	IP/MPLS/P OS	Legacy/AT M/MPLS/P OS	IP/ATM	Legacy/AT M
44	58%	84		106	
552	21%	592		636	
576	3%	616		689	
1500	18%	1540		1696	
IP Weighted Mean					
429		469		521	
Legacy Traffic ATM AAL1 & AAL2	20%		68		53
Total Weighted Mean					
		MPLS Core		ATM Core	
		389		429	

For links of OC12/STM4 and above, then frames of 1500 bytes do not cause significant delay variation for short real-time packets.

- 5 The arrangement and method described above provide a network model in which: -
- ATM is used for low or medium capacity access e.g. xDSL, third generation wireless and T1/E1 leased-lines,
 - frame-mode is used for access to corporate sites,
 - frame-mode is used for core transport.

10

This provides a better match for emerging technologies than a MSF model which seeks to impose ATM for all core applications. A comparison of the adaptation and switching plane functions for the ATM and MPLS core network options is illustrated in figures 9a to 9d.

15

Figures 9a to 9d shows comparisons between adaptation and switching plane functions for preferred embodiments of the invention (figures 9a and 9c) and for legacy networks (figures 9b and 9d). the figures illustrate comparisons of the adaptation and switching plane functions for ATM and MPLS core networks and show the reduction in functional layers provided by the arrangement and method described above. This reduction enables further increases in line-speed operation.

20

It will be understood that the above description of a preferred embodiment is given by way of example only and that various modifications may be made by those skilled in the art without departing from the spirit and scope of the invention.

25

CLAIMS:-

- 5 1. A communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture whereby IP services are run directly over a frame-based core network and legacy services are run over ATM adaptations and emulated ATM services.
- 10 2. A communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport network is provided, and a network management system arranged to define and manage one or more virtual public/private networks within said communications network, wherein groups of
15 said core nodes are configured as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes.
- 20 3. A communications network as claimed in claim 2, wherein each said path is specified by identifying first and second real nodes and one or more abstract nodes therebetween.
- 25 4. A communications network as claimed in claim 3, wherein a said virtual public/private network (VPN) is defined with multiple stages of first level constraint-based routed label switched paths.
- 30 5. A communications network as claimed in claim 4, wherein each said abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are part of that abstract node.
- 35 6. A communications network as claimed in claim 5, and incorporating a super-ordinate management function arranged to control creation, modification and deletion of virtual switches.

7. A communications network as claimed in claim 6, wherein said super-ordinate manager is adapted for defining virtual private/public networks (VPN) and for placing traffic trunks to realise those VPNs
- 5 8. A communications network as claimed in claim 7, and incorporating a sub-ordinate management function arranged to provide virtual switch management.
9. A communications network as claimed in claim 8, wherein a (sub) network manager is responsible for constructing an abstract node information model
10 representation of the network which it passes to a super-ordinate manager.
10. A method of operating a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels, wherein ATM is used for low or medium capacity access, and wherein frame mode is
15 used frame-mode is used for access to corporate users and for core transport.
11. A method of operating a communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport network is provided,
20 and having a network management system arranged to define and manage one or more virtual public/private networks within said communications network, the method comprising configuring groups of said core nodes as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the
25 management system by specifying a series of abstract nodes.
12. A method as claimed in claim 11, wherein each said path is specified by identifying first and second real nodes and one or more abstract nodes therebetween.
30
13. A method as claimed in claim 12, wherein a said virtual public/private network (VPN) is defined with multiple stages of first level constraint-based routed label switched paths.
- 35 14. A method as claimed in claim 13, wherein each said abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are part of that abstract node.

15. A method as claimed in claim 14, and including creation, modification and deletion of virtual switches via a super-ordinate management function.
- 5 16. A method as claimed in claim 15, wherein said super-ordinate manager is adapted for defining virtual private/public networks (VPN) and for placing traffic trunks to realise those VPNs.
- 10 17. A method as claimed in claim 16, wherein traffic trunks are specified by defining paths between service nodes passing through abstract nodes, and wherein those paths are used to construct CR-LDP requests to establish the traffic trunks.
- 15 18. Software in machine readable form on a storage medium for controlling a method of operating a communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport network is provided, and having a network management system arranged to define and manage one or more virtual public/private networks within said communications network, the method comprising configuring groups of said core nodes as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes.
- 20

ABSTRSTRACTCOMMUNICATIONS NETWORK

- 10 A communications network comprises a plurality of core nodes establishing a transport network, and service nodes each coupled to a core node whereby access to the transport network is provided. A network management system is arranged to define and manage one or more virtual public/private networks within the communications network. Groups of core nodes are configured as abstract nodes within which any available path may selected to achieve a requested connection.
- 15 End to end label switched paths are established via the management system by specifying a series of abstract nodes.


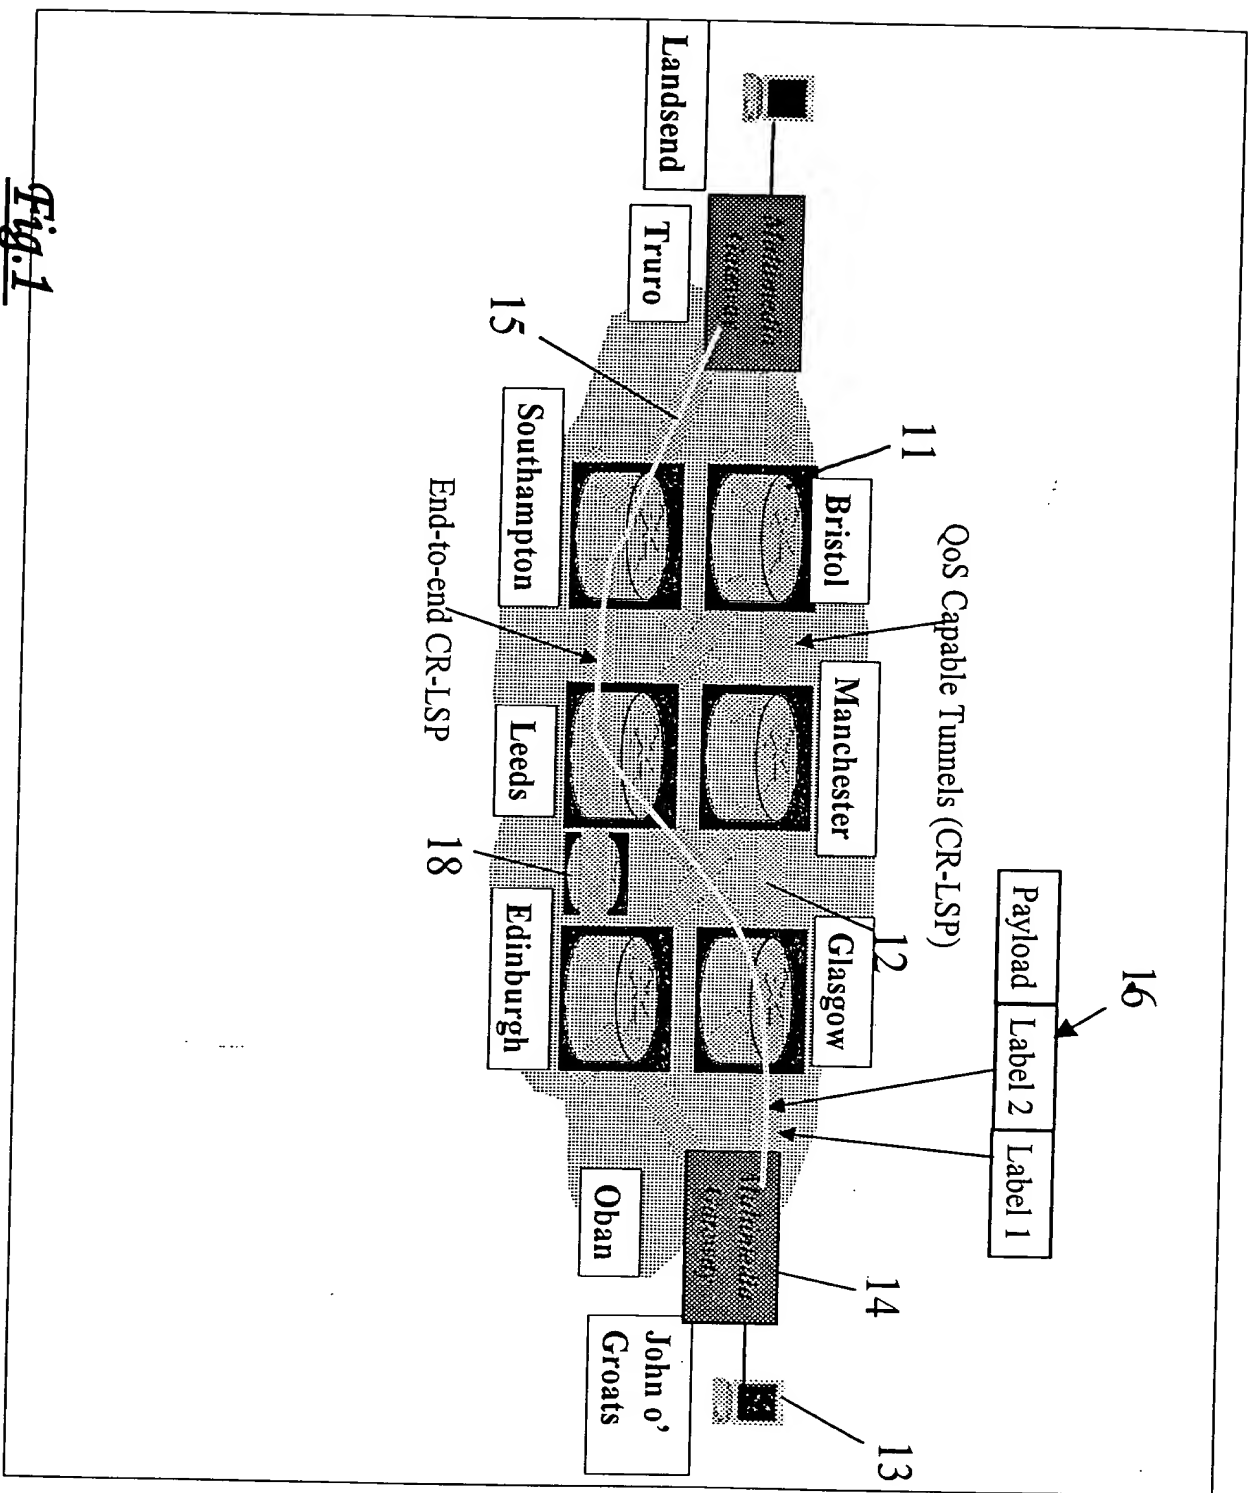


Fig. 1

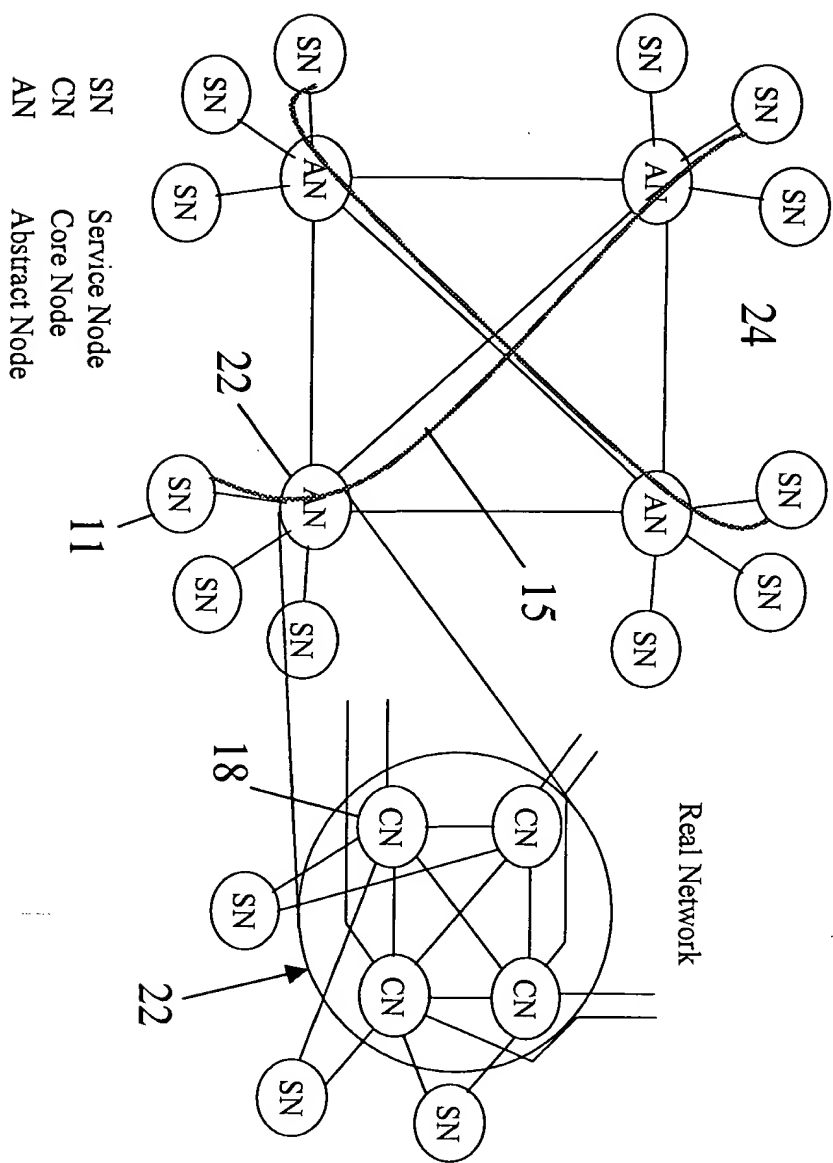

SN Service Node
 CN Core Node
 AN Abstract Node

Fig. 2

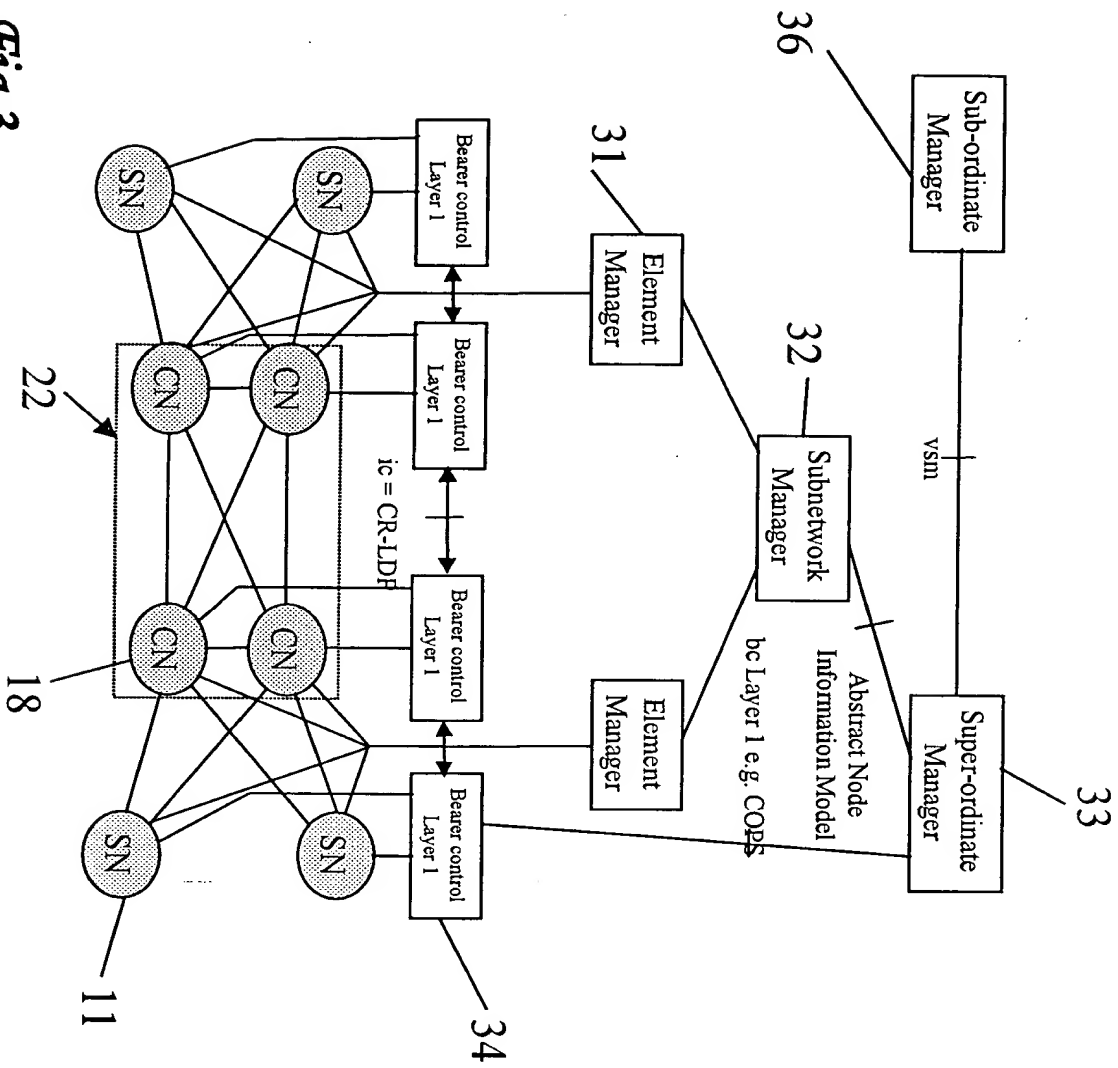


Fig.3

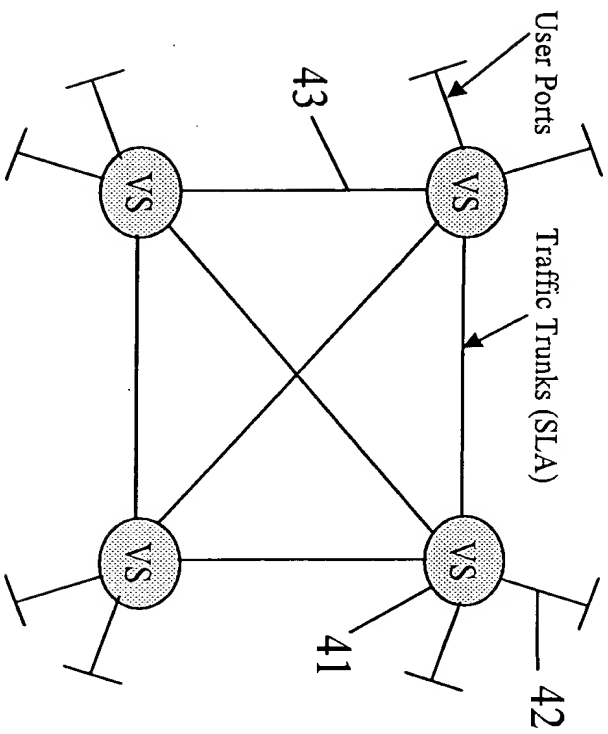


Fig. 4

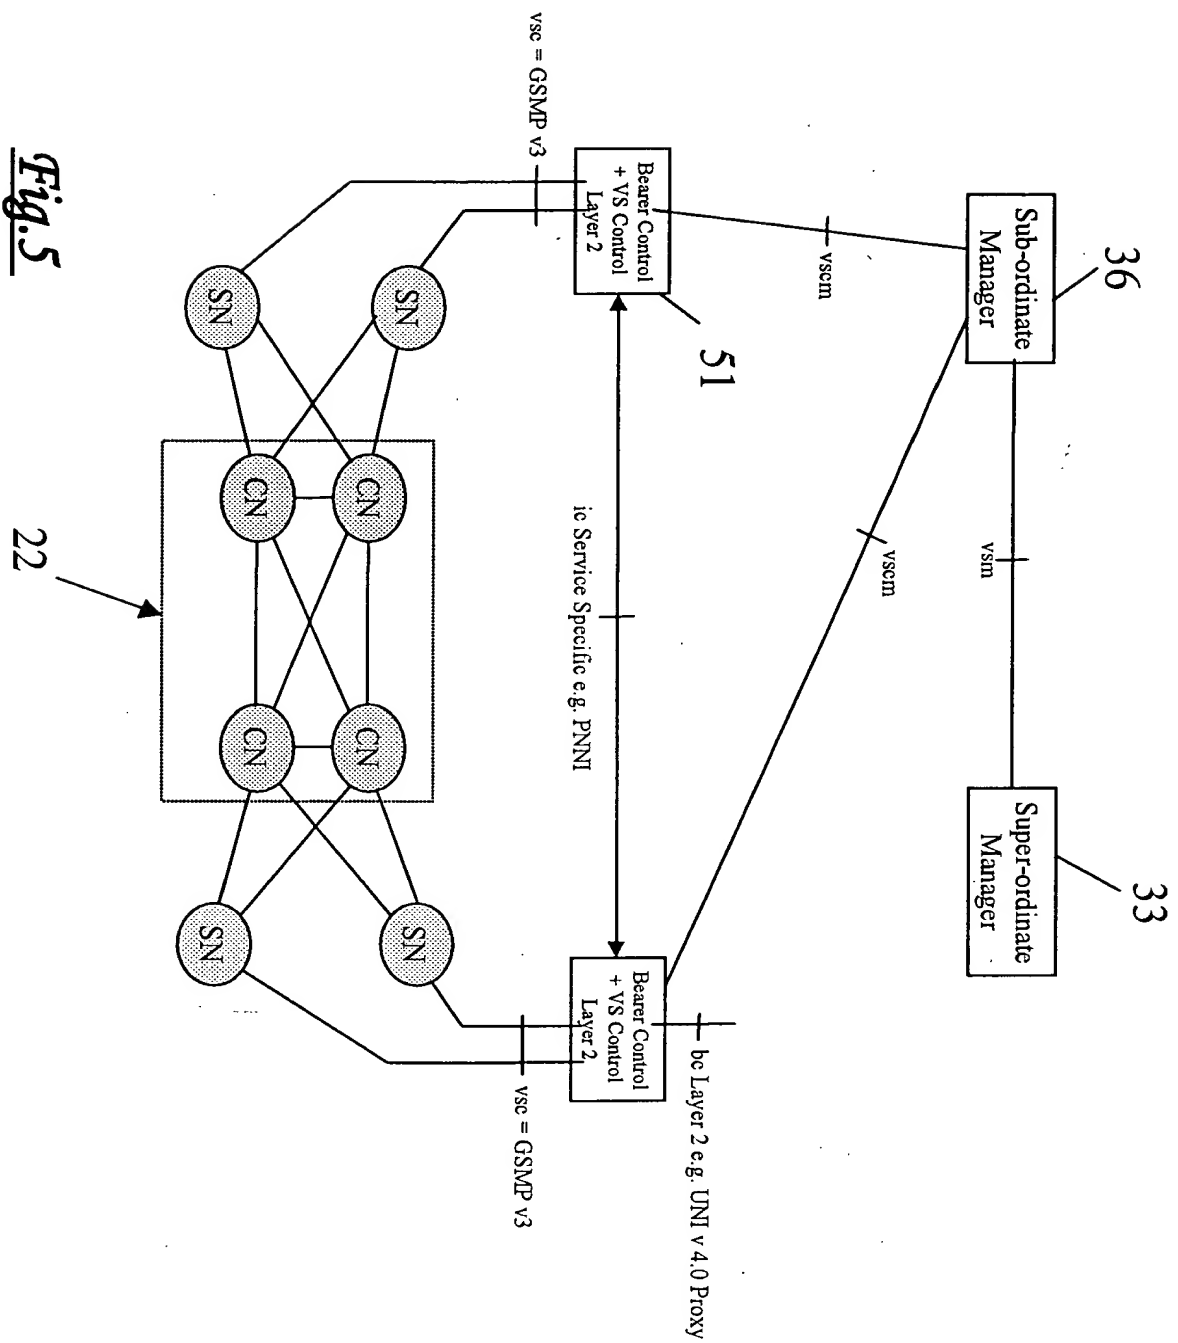


Fig. 5

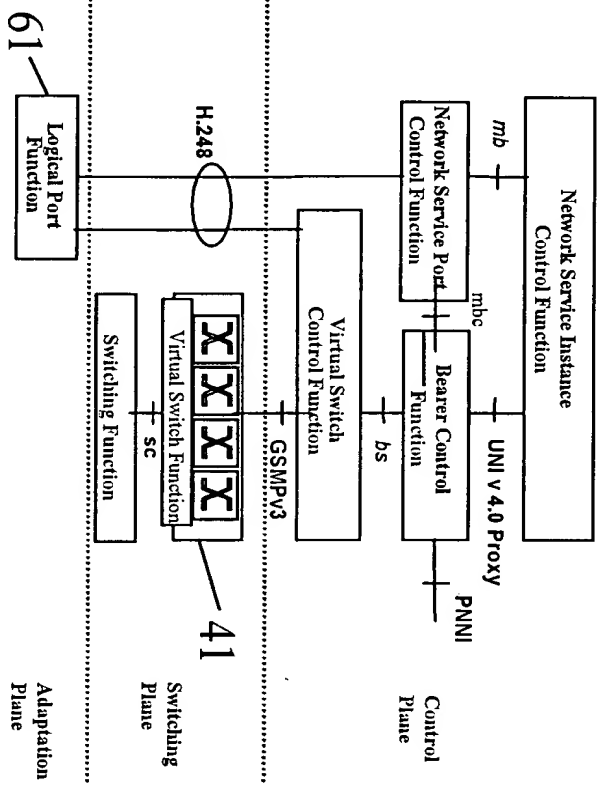


Fig. 6

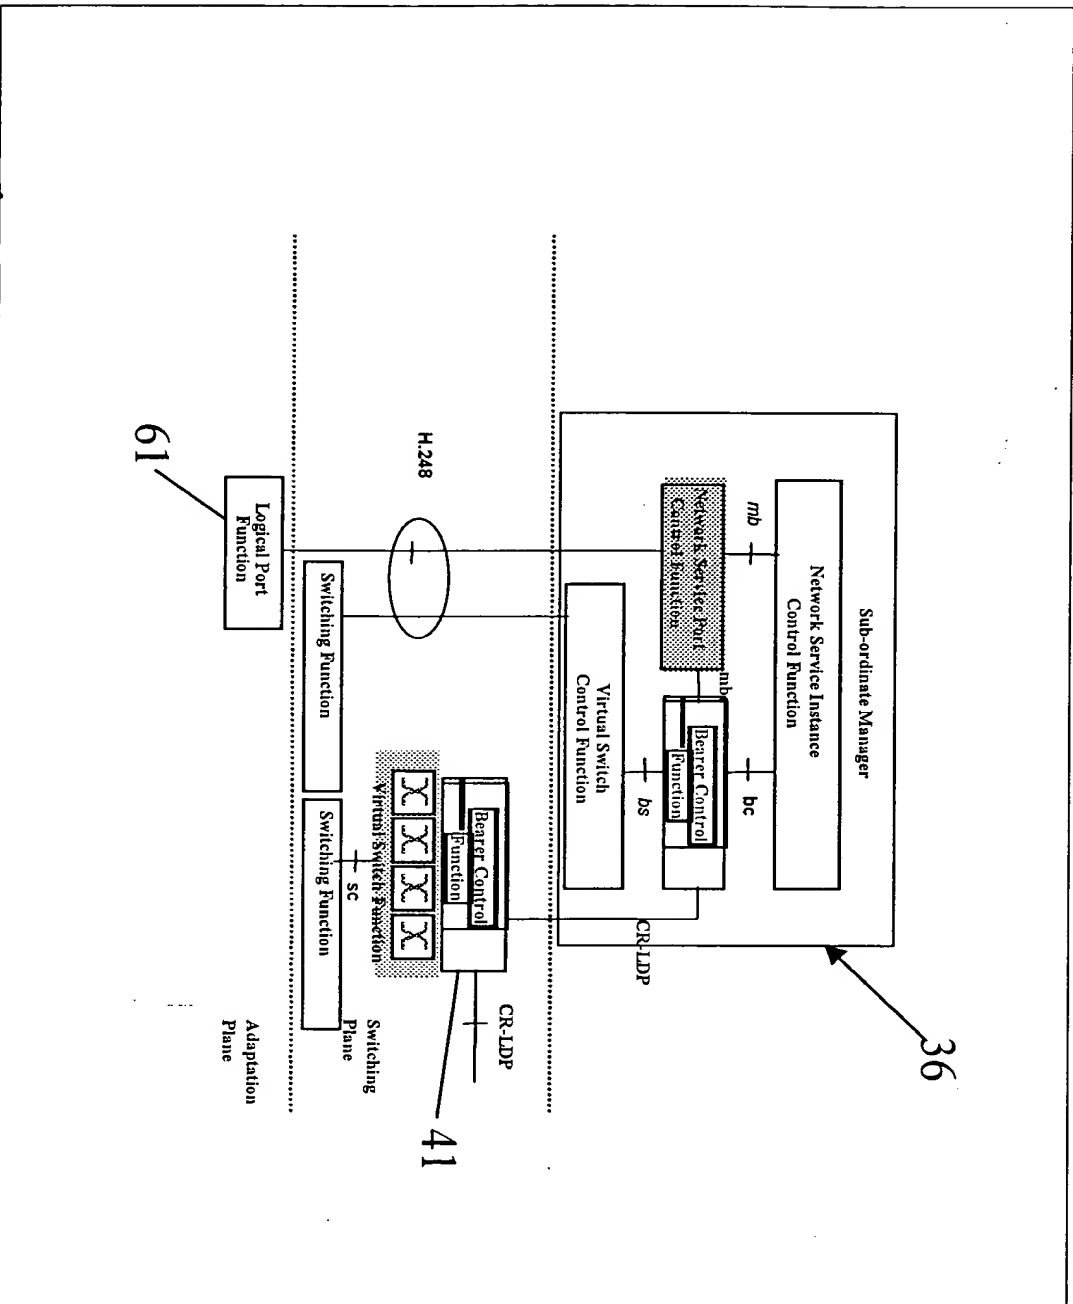


Fig. 7

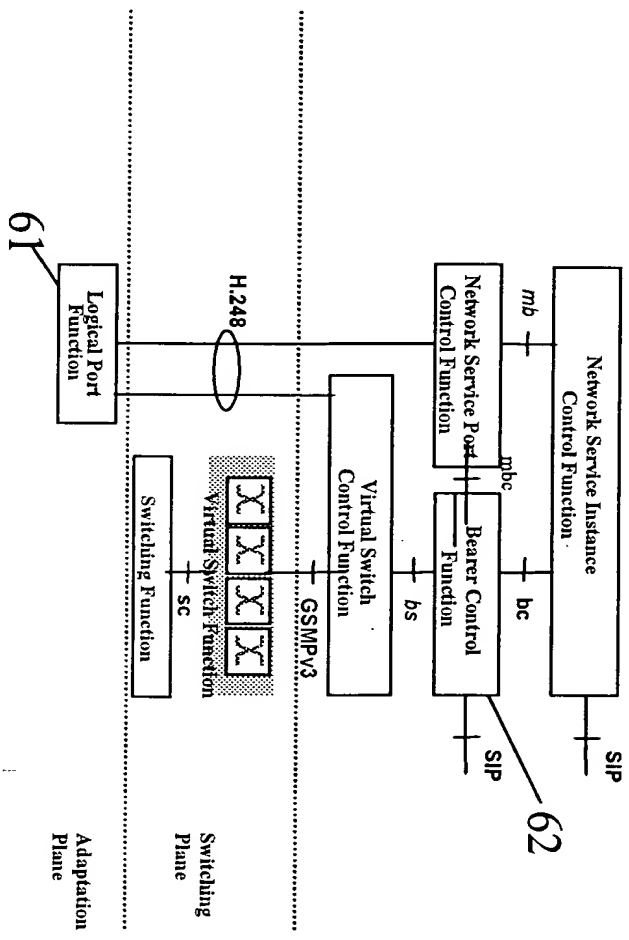


Fig. 8

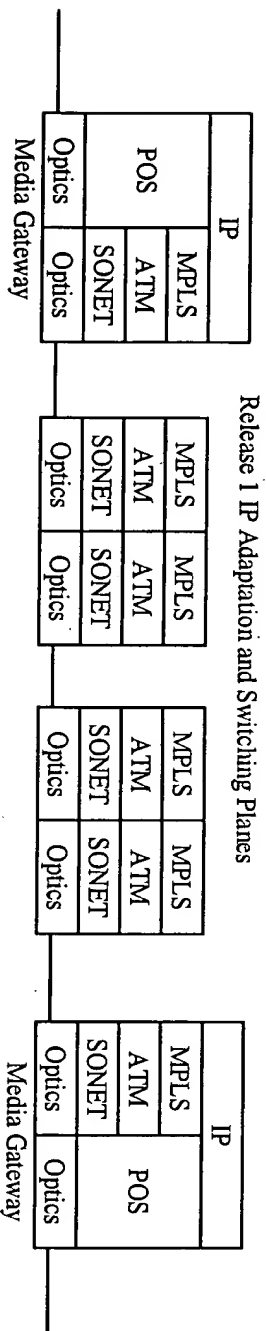


Fig. 9a

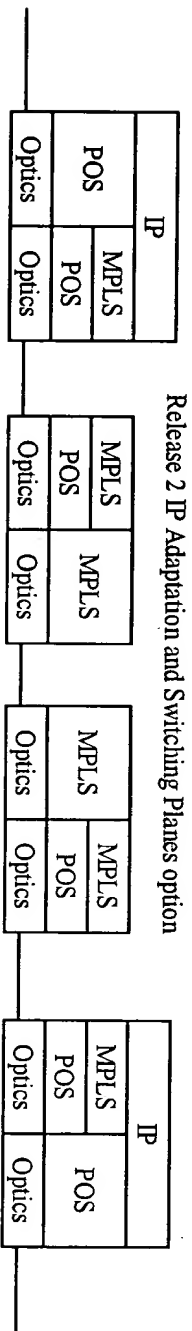


Fig. 9b

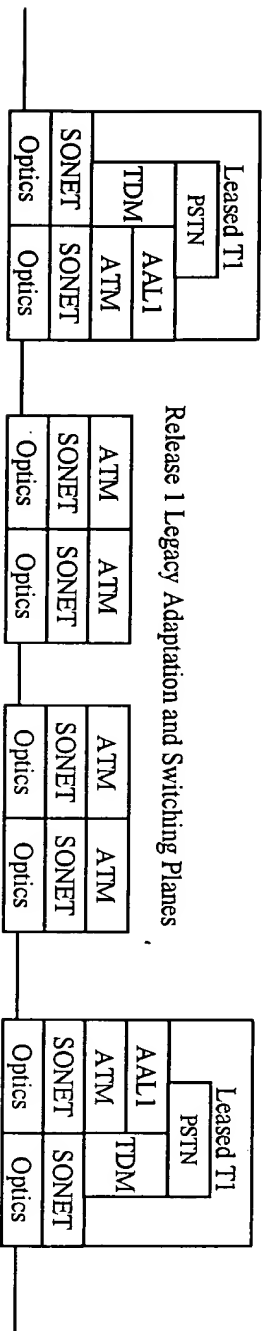


Fig. 9c

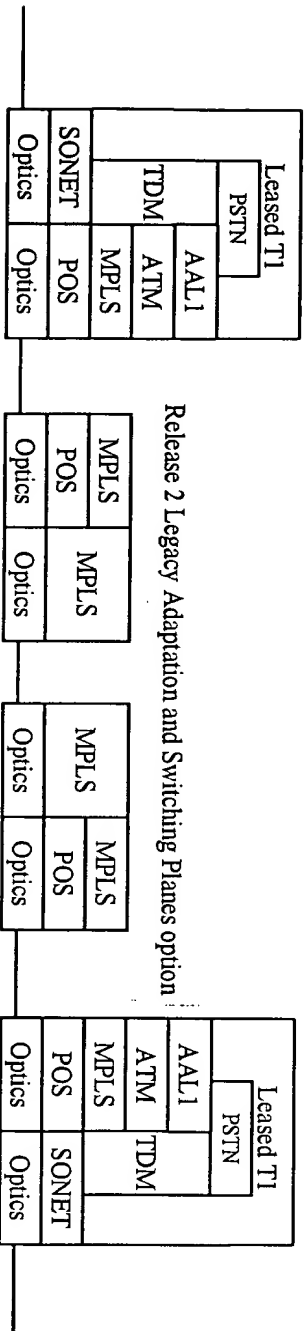


Fig. 9d

Fig. 9